

TamlynWrap® Drainable WRB

Tech Support / Sales: 800-334-1676 www.tamlyn.com

DESIGN FEATURES


TamlynWrap® Drainable WRB is a unique moisture management product from Tamlyn. This innovative product combines a high performance Water Resistive Barrier (WRB) with a unique drainage pattern. Its unique design can remove 100 times more bulk water from a wall versus standard wraps.

BENEFITS

- Drains faster than other drainable wraps
- · Can be installed in any direction
- Easier installation with 5' rolls
- Non-compressible filaments (1.5mm)
- Vapor permeable
- Type 1 Air Barrier
- Meets and exceeds ICC AC38 code requirements for WRB and drainability
- · Works with various cladding materials

WARRANTY

Tamlyn is committed to providing great products that are durable and long-lasting. All wraps offer a 15 Year Product Warranty and, when installed with other Tamlyn accessories as a system, Tamlyn offers a 25 Year Product and Labor Limited Warranty.

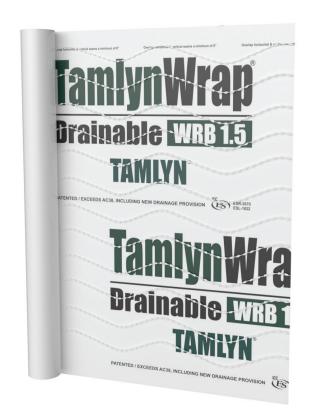

Rolls are 5' x 100'

Test Method		*Test Results
Dry Breaking Force / ASTM D 5034	Cross-Machine Direction	52.3 lbf
	Machine Direction	60.2 lbf
Water Resistance / AATCC Test Method No. 127 (55cm water x 5hrs)	Control	No water leakage
	Weathered	No water leakage
Water Vapor Transmission / ASTM E 96		19 perms
Cold Mandrel Bend	Cross-Machine Direction	House wrap did not crack; filaments did not crack
	Machine Direction	House wrap did not crack; filaments did not crack
Air Permeance / ASTM E2178 (material)		<0.004 (CFM/ft²)
Air Barrier / ASTM E1677 (system)		Type 1 Air Barrier
Air Resistance		Pass
Water Resistance		Pass
Drainage Efficiency / ASTM E 2273		≥95.7%
Combustiblity / ASTM E 84		FSI - Class A
		NSDI - Class A
Weathering-UV Resistance		120 days max

*Based on testing averages.

